

Custom Solutions

## Mil-Spec MIL-C-26482 Series 2 Assemblies

TPC provides a diverse selection of circular connector assemblies designed and manufactured to meet MIL-C-26482 Series 2 standards. With the same footprint and configuration styles as the MIL-C-26482 Series 1, the Series 2 offers a high temperature insulator that is rated to 200°C, making them suitable for a wide array of demanding, high temperature applications.



**Performance Characteristics** ✓ Connector Operating Temperature: -55°C to 200°C

**Features & Benefits**

<p><b>Wide Variety Of Contact Layouts</b></p> <p>Precision-machined solder contacts featuring silver or gold plating are accessible in a range from 20 AWG to 16 AWG. Additionally, we provide specialized crimp and thermocouple contacts tailored to specific applications.</p>	<p><b>Rugged Shell</b></p> <p>TPC's custom mechanical backend uses an aluminum alloy shell and hardware for durability with minimal weight. Optional mesh strain relief available for extreme flexing near connection point.</p>	<p><b>Overmolded Backend</b></p> <p>Available with a fully overmolded backend to effectively safeguard against the ingress of liquids and particles.</p>	<p><b>Bayonet Coupler</b></p> <p>Provides easy mating and disconnecting with a secure, three point locking system.</p>	<p><b>Silicone Insulator</b></p> <p>Provides heat protection at the connection point up to 200°C.</p>
---	--	--	--	---

Custom Solutions

## M23 Connector Assemblies

TPC M23 connector assemblies are a reliable and robust choice for applications involving servo motors and encoders. These assemblies feature a fully molded backend, with optional mechanical configurations available, ensuring durability against continuous flexing and pulling. This makes M23 connector assemblies the ideal solution for maintaining smooth and uninterrupted operation in various industrial automation settings.



**Performance Characteristics** ✓ Connector Operating Temperature: -40°C to 125°C


**Features & Benefits**

<p><b>Overmolded Backend</b></p> <p>Effectively safeguards against the ingress of liquids and particles.</p>	<p><b>Wide Variety Of Contact Layouts</b></p> <p>Precision machined, gold plated contacts suitable for both power and signal applications up to 19 conductors.</p>	<p><b>Modularity</b></p> <p>Offered with power, signal and ethernet under one connector shell to reduce the number of connectors needed in a specific application.</p>	<p><b>Industry Compatibility</b></p> <p>Capable of seamlessly connecting with receptacles found on widely-used automation equipment, including Siemens, Allen Bradley, and many other brands.</p>
--	--	--	---

Custom Solutions

## Rectangular Connector Assemblies

TPC offers rectangular connector assemblies that are suitable for a wide variety of industrial applications including industrial machinery, automation systems, and telecommunications equipment. The connectors are characterized by their rectangular shape and robust construction, making them suitable for harsh environments and demanding conditions.

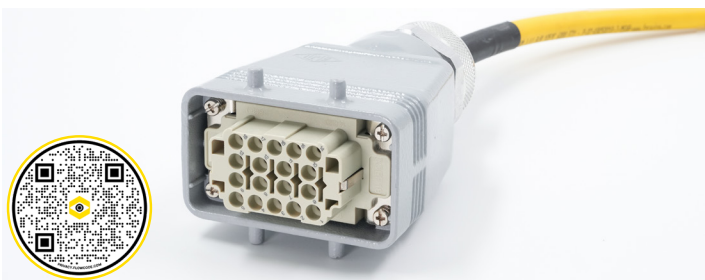

**Performance Characteristics** ✓ Connector Operating Temperature: -40°C to 125°C

**Features & Benefits**

<p><b>Industry Compatibility</b></p> <p>Designed and built to mate to existing equipment without modification.</p>	<p><b>Wide Variety Of Contact Layouts</b></p> <p>Offered in contacts layouts for 1 to 108 conductors ranging from 1 AWG to 26 AWG.</p>	<p><b>Modularity</b></p> <p>Can accept power, signal, communication, ethernet and thermocouple/RTD under one connector housing.</p>	<p><b>Custom Backend Options</b></p> <p>Offered with custom backend options for environmental sealing and strain relief. These can include a wide variety of cord grips, glue shrinks, and mesh strain relief.</p>
--	--	---	--