


Valve Connection Cordsets

# Quick-Connex® Sub-Micro DIN Standard 9.4mm

Quick-Connex® DIN connector assemblies feature a self-sealing polyurethane shell design providing environmental protection up to IP67/ NEMA 6, an integrated LED connector head, built in surge suppression and secured to our Trex-Onics® 18 AWG cable. Available with a Blunt Cut or with a Mini or Micro connector.

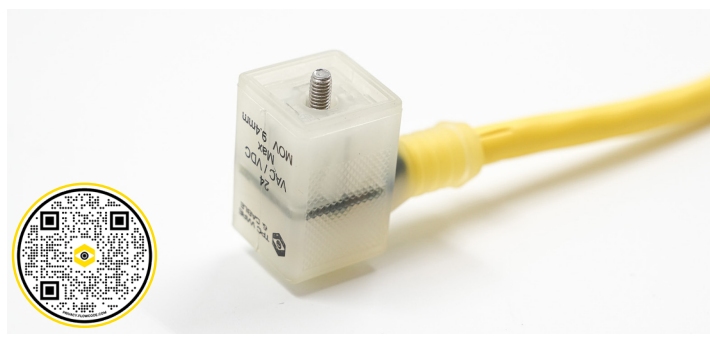

**Ratings**



Connection Voltage: 6–24V AC/DC or 120V AC @ 50/60 Hz

Rated Voltage Max: 250V AC @ 50/60 Hz, 300V DC

Nominal Current: 6 Amps

IP67/NEMA 6 Rated

**Performance Characteristics**

- ✓ Operating Temperature Range -25°C to 80°C
- ✓ Bend Radius (Static): 6x Cable O.D.
- ✓ Bend Radius (Dynamic): 8x Cable O.D.

**Engineered to Resist**

- Flexing
- Abrasion
- Chemicals

**Features & Benefits**

**Cordsets made with Trex-Onics® 18AWG/3 Conductor Cable with Heavy-Duty Yellow Polyurethane Jacket**  
Provides superior first line defense against tearing, abrasion, impact, oil, ozone and most chemicals.

**Fully Molded, Rugged Polyurethane Shell Design**  
Completely seals the unit preventing dust, fluids, and contaminants from damaging the internal wiring while providing superior strain relief. Resists damage from impact, abrasion, oil, and most chemicals.

**Captive Center Screw**  
Allows for easy installation and will not fall out, preventing loss.

**Surge Suppression**  
Built into each DIN to protect against electrical spikes or surges.

**Super Bright LED Status Light**  
Incorporated into translucent DIN body, protecting LED from damage. Easily visible from multiple angles.

**Self-Sealing Gasket-Free Unit**  
Polyurethane shell seals without the need for a gasket, providing protection up to IP67/NEMA 6 from dust, moisture and oil.

**Optional All Polyurethane Micro or Mini-Head Design**  
Ensures 100% bonding between jacket and connector head while resisting damage from impact, abrasion, oil, and most chemicals.



**Ordering Information**

For complete product ordering information, please scan the QR Code or contact your TPC sales representative

Description	Blunt Cut Part No.	Cordset Length (ft)	Cordset Length (mt)
9.4mm DIN, 120V, LED & Suppression, 3 Conductor, Ground Position at Cable Outlet	D03134XXAM002	6.6	2
	D03134XXAM003	9.8	3
	D03134XXAM004	13.1	4
	D03134XXAM005	16.4	5
	D03134XXAM006	19.7	6
9.4mm DIN, 24V, LED & Suppression, 3 Conductor, Ground Position at Cable Outlet	D03234XXAM002	6.6	2
	D03234XXAM003	9.8	3
	D03234XXAM004	13.1	4
	D03234XXAM005	16.4	5
	D03234XXAM006	19.7	6